



## MODEL .5T - 1T THD

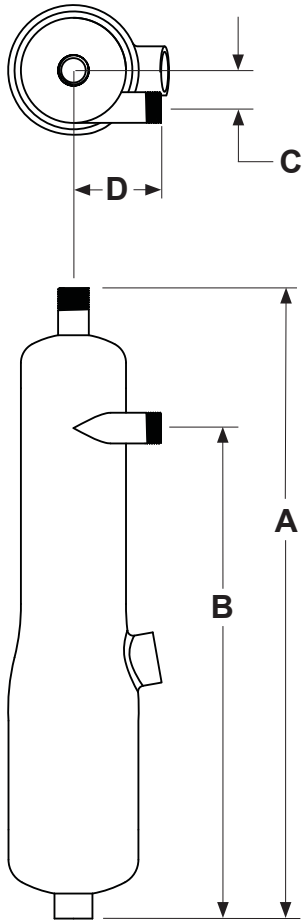

### General Specs:

1. Pressure @ Deg.F: 150PSI @ 250 Deg.F
2. Inlet/Outlet Connection: Threaded
3. Exterior Finish: Blue Fusecoat Polyester
4. Std. Material: Carbon Steel
5. Warranty: 5 Years
6. Max. Particle Size: 1/2" (12.7 mm)

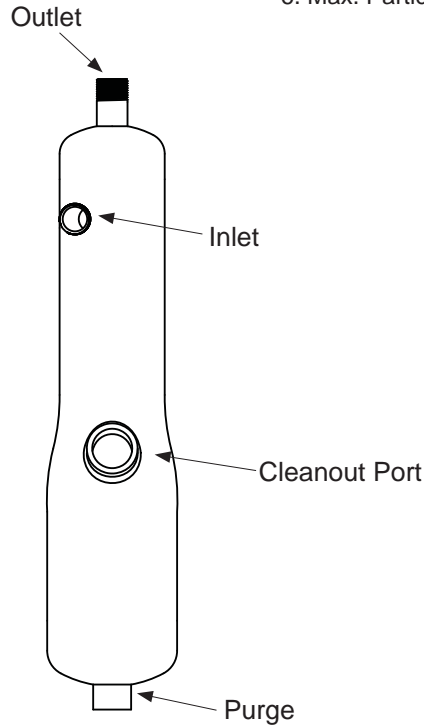

SIZE	FLOW RANGE GPM ( $m^3/hr$ )	INLET/ OUTLET	DIMENSIONS Inches/(mm)				PURGE	CLEANOUT PORT
			A	B	C	D		
0.5T	4.5-12 (1-3)	1/2" MNPT	24-1/4 (616)	19-5/16 (491)	3/4 (19)	2-3/4 (70)	1" FNPT	1-1/2" FNPT
.75T	8.5-19 (2-4)	3/4" MNPT	24-3/4 (629)	20 (508)	1-1/4 (32)	3 (76)		
1T	14-29 (3-7)	1" MNPT	27 (686)	21 (533)	1-9/16 (40)	3-3/4 (95)		

### SHIPPING WEIGHT

	0.5T	0.75T	1T
Lbs.	19	22	25
Kg.	9	10	11

### OPTIONS: (See Next Page for Model Configuration Matrix)

- Stainless Steel
- Non-Std. Press. Requirements
- Flanged or Grooved Ends Available  
(Consult Factory)

**MAKING WATER WORK**

2801 Barranca Parkway  
Irvine, CA 92606 | 386.663.3370 | info@griswoldwatersystems.com

GriswoldWaterSystems.com

GWS-1174 Rev A  
CS-SS  
.5T-1T THD

# Model Configuration Matrix

SIZE	PART NO.
1/2"	0.5T
3/4"	.75T
1"	1T
1-1/4"	1.2T
1-1/2"	1.5T
2"	2T
2.5"	2.5T
3"	3T
4"	4T
6"	6T
8"	8T
10"	10T
12"	12T
14"	14T
16"	16T
18"	18T
20"	20T

		BODY STYLE												
		THD	FLG	LPF	GE	RDT	RDF	LPRD	RDG	THA	FLA	RDA	LPA	LPRDA
TOP	NON-REMOVABLE	•	•	•	•					•	•		•	
	REMOVABLE					•	•	•	•			•		•
CONNECTION	THREADED	•				•				•				
	FLANGED		•	•			•	•			•	•	•	•
	GROOVED				•				•					
CONSTRUCTION	STANDARD	•	•	•	•	•	•	•	•					
	ASME									•	•	•	•	•

SERIES	CS-FLG	CS-FLA	CS-RDF	CS-RDA	CS-LPF	CS-LPA	CS-LPRD	CS-LPRDA
0.5T	•	CONSULT FACTORY	•	CONSULT FACTORY	<b>Not Available in Sizes 0.5 through 3T</b>			
.75T	•		•					
1T	•	•	•	•				
1.2T	•	•	•	•				
1.5T	•	•	•	•				
2T	•	*	•	*				
2.5T	•	*	•	*				
3T	•	*	•	*				
4T	•	•	•	•				
5T	•	•	•	•				
6T	•	•	•	•				
8T	•	•	•	•				
10T	•	•	•	•				
12T	•	•	•	•				
14T	•	•	•	•				
16T	•	•	•	•				
18T	•	•	•	•				
20T	•	•	•	•				

NOTE: Carbon Steel material. Consult factory for material alternative.