




Application

The ZS-CCV... weather shield provides moderate protection for valves which are mounted outdoors. This product is designed as a water tight enclosure. The housing allows easy mounting over the actuator, while allowing easy viewing of the actuator in operation. Weather shield for PICCV/CCV to provide protection for actuators in outdoor applications.

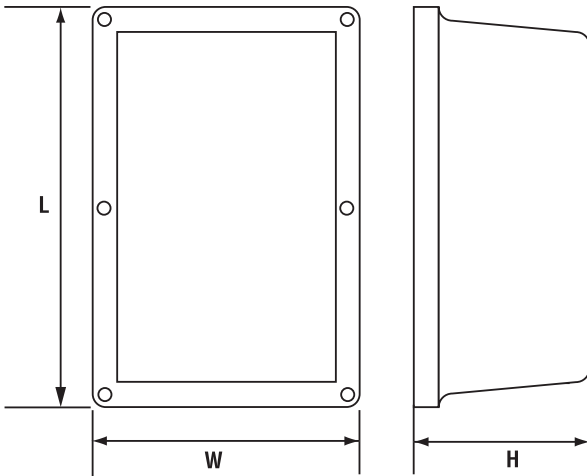

| Specifications | |
|--------------------------|-----------------------------------|
| Cover | PETG with UV resistant smoke tint |
| Perimeter Gasket | Silicon Rubber |
| Rubber Gasket | Silicon Rubber |
| Spring Clips | Stainless Steel |
| Temperature limitations: | -22°F to 122°F (-30°C to 50°C) |
| Plate (ZS-CCV-100) | Aluminum |
| Plate | Galvaneal w/black powder coat |

| Part Number | Actuator |
|----------------|-------------|
| ZS - CCV - 90 | LF, AF |
| ZS - CCV - 100 | LRB(X), ARX |
| ZS - CCV - 110 | AFRB(X) |

| L | W | H |
|--------------|-------------|------------|
| 16.25" [413] | 8.75" [222] | 4.5" [114] |

Parts List

- Cover including Rubber Perimeter Gasket, Rubber Gasket
- Back Plate
- Anti-Rotation Post with screw and lock washer
- Valve Gasket
- Assorted Cap plugs for unused holes

- Screws AF - 2 bolts with nylon insert locking nuts
- LRB(X), ARX - 1 screw, 1 washer

No weather shield available at this time for the TF and TR actuators. Designed for NEMA 4 specifications.

* Cannot be used with B6 series.